


Quick Assembly Connector -drawer type KT-6068 & KT-6066

Introduction:

Quick Assembly SC connector can provide quick and easy terminations of fibers

in the field. It allows the installer to terminate and make connection in minutes at equipment and fiber patch panels. This connector system with features of high installation quality, high success rate and high reliability.

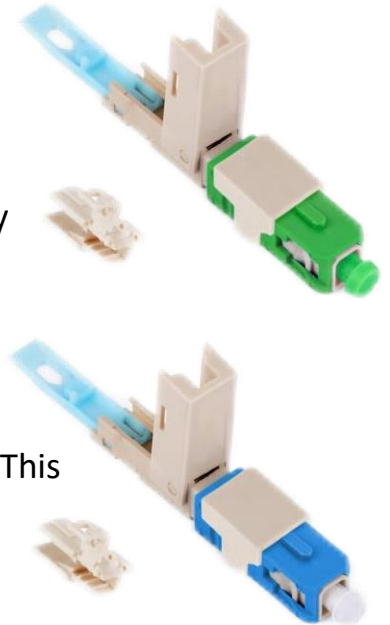

Application :

FTTH & Outdoor Fiber Terminal End

Harsh Environment

FTTA BBU RRU

Data Video Transmission

Optical Fiber Access Of Mobile Base Station

Item	KT-6066	KT-6068
Length	52mm	
Ferrules	SM/UPC	SM/APC
Inner Diameter of ferrules	125um	
Insertion Loss	AVG≤0.3dB MAX≤0.5dB	
Return Loss	UPC≥45dB	APC≥50dB
Working Temperature	-20~+75℃	
Storage Temperature	-40~+85℃	
Mating Times	500Times	
Cable Diameter	DROP CABLE : 2*1.6mm /2*3.0mm /2.0*5.0mm	

Parameter:

Operation Instruction:



SM/APC



SM/UPC

Necessary Tools:



FTTH Drop Cable Stripper



Fiber Cleaver



Dust-free cloth & alcohol bottle



Fixed length device